

MODEL 5073NS-AD

Auto-Dial Pager, Voice and Email Alarm Software

General Description

NovaStar monitors system data for alarm conditions and sounds alarms when those conditions are met. The standard alarm sounded is at the central station. If your central station is not manned 24 hours a day, a remote alarm system may be needed. Several alarm options are available for remote alarms. Each alarm option lets you place several telephone numbers, pager numbers or Email addresses in an alarm action group.


Model 5073NS-AD Auto-dial/Pager Software uses auto-dialer software to dial out through a telephone modem and send alarm messages to pagers or printers. Numeric alarm messages are sent to analog pagers, text alarm messages are sent to digital pagers and message files are sent to printers.

Model 5073NS-ADAS3 ALERT-Talk-3 Alarm Software is the NovaStar interface for Model 5071ADAS3 Central Station Auto-Dialer. The software executes alarm dial-outs and assembles digitally recorded speech to describe alarm conditions. The software also supplies current sensor data values to the Model 5071ADAS3 for dial-in user system interrogation using the telephone touch tone keypad.

Model 5073NS-EMAIL email alarm software sends an email alarm message to email addresses using the NovaStar Internet mail system.

Ordering Information

5073NS-ADAuto-dial/Pager Alarm Software
5073NS-ADAS3ALERT-Talk-3 Alarm Software
5073NS-EMAILEmail Alarm Software

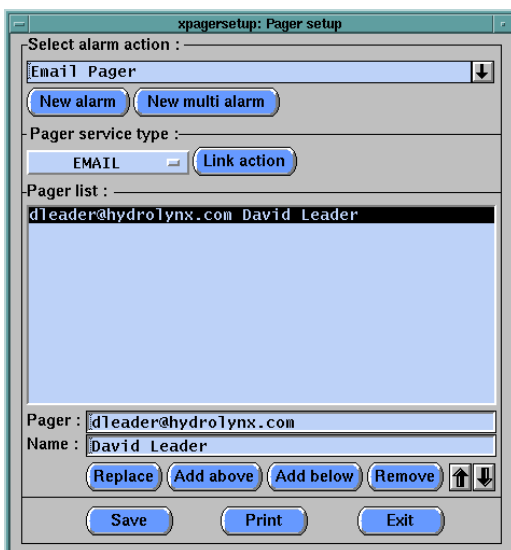

Model 5073NS-AD Auto-Dial/Pager Software Setup